

440-460w

Draco Module Series

N-TOPCON HIGH EFFICIENCY 96-16BB-W-WG

Bloomberg
NEW ENERGY FINANCE

Tier1



Product Characteristics

- Optimized cell size brings higher power and Lower transportation costs

Extraordinary Product Performance


- N-type with lower LID and LeTID
- Up to 30% additional power yield benefited from bifacial technology and over 80% cell bifaciality
- Competitive high-temperature performance with ameliorated temperature coefficient
- Better weak illumination response, higher power generation with N-TOPCon technology

High Quality Reliability

- Industry-leading cell processing technology and dual glass contributes to excellent anti-PID characteristic

Wider Application Conditions

- Universal solution for residential and C&I rooftops
- BIPV, vertical installation, snowfield, high-humid area, windy and dusty area
- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems

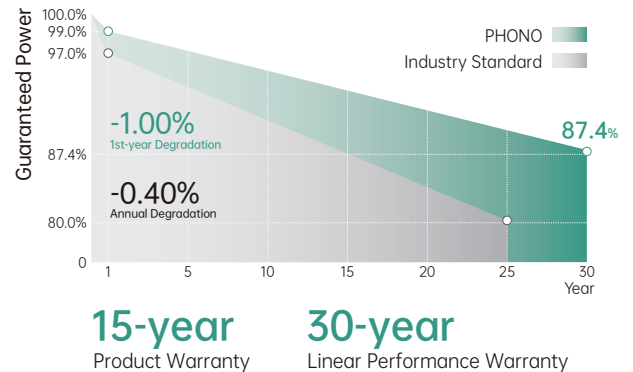

MANAGEMENT SYSTEM CERTIFICATES

IEC 61215, IEC 61730

ISO 9001
2015 / Quality management system

ISO 14001
2015 / Standards for environmental management system

ISO 45001
2018 / International standards for occupational health & safety



Electrical Typical Values

Model	PS440L8GF-16/QNH		PS445L8GF-16/QNH		PS450L8GF-16/QNH		PS455L8GF-16/QNH		PS460L8GF-16/QNH	
	1000V	1500V	1000V	1500V	1000V	1500V	1000V	1500V	1000V	1500V
Testing Condition	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Power (Pmpp)	440	337	445	341	450	345	455	348	460	352
Rated Current (Imp)	14.87	11.98	14.90	12.00	14.93	12.02	14.96	12.05	14.99	12.07
Rated Voltage (Vmpp)	29.59	28.13	29.87	28.39	30.15	28.65	30.42	28.92	30.69	29.17
Short Circuit Current (Isc)	15.54	12.52	15.58	12.55	15.62	12.58	15.66	12.61	15.70	12.64
Open Circuit Voltage (Voc)	35.17	33.68	35.48	33.97	35.79	34.27	36.09	34.56	36.40	34.85
Module Efficiency (%)	22.02		22.27		22.52		22.77		23.02	

STC (Standard Testing Conditions): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C

NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

BNPI

Maximum Power (Pmax)	485	490	496	501	507
Optimum Operating Current (Imp)	16.38	16.41	16.44	16.48	16.51
Optimum Operating Voltage (Vmpp)	29.59	29.87	30.15	30.42	30.69
Short Circuit Current (Isc)	17.13	17.15	17.21	17.24	17.30
Open Circuit Voltage (Voc)	35.17	35.48	35.79	36.09	36.40

BNPI: Front Side Irradiation 1000W/m², Back Side Reflection Irradiation 135W/m², AM 1.5, Ambient Temperature 25°C

Mechanical Characteristics

Cell Type	N Type Monocrystalline
Dimension (L × W × H)	Length: 1762mm (69.37 inch) Width: 1134mm (44.65 inch) Height: 30mm (1.18 inch)
Weight	23.0kg (50.71 lbs)
Glass	2.0mm/2.0mm Heat Strengthened Glass
Frame	Anodized Aluminium Alloy
Cable (Including Connector)	4mm ² (IEC), (+): 350mm, (-): 250mm or Customized Length
Junction Box	IP 68 Rated

Temperature Ratings

Voltage Temperature Coefficient	-0.25%/°C
Current Temperature Coefficient	+0.04%/°C
Power Temperature Coefficient	-0.29%/°C
Power Tolerance	0~+3%
NOCT	42±2°C
Bifaciality	80±5%




Absolute Maximum Rating

Operating Temperature	From -40 to + 85°C
Hail Diameter @ 80km/h	Up to 25mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	II
Fire Rating (IEC61730)	C
Maximum System Voltage	DC 1000V/1500V

Packing Configuration

Container	40' HQ
Pieces/Container	936
Pcs/Pallet	36
Pallets/Container	26

Electrical Characteristics

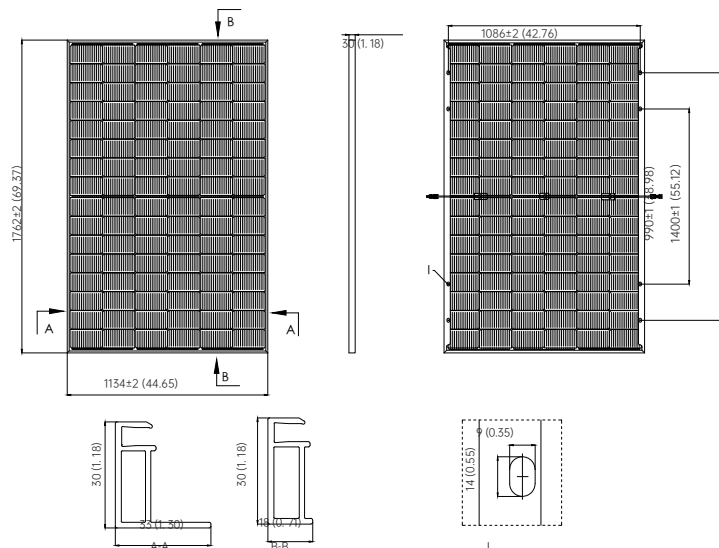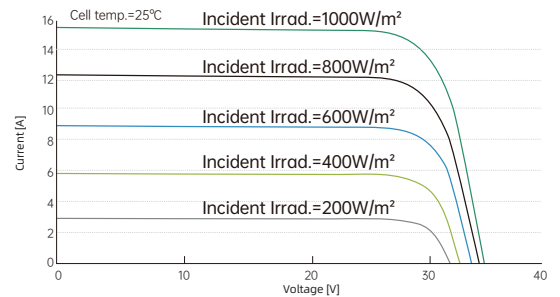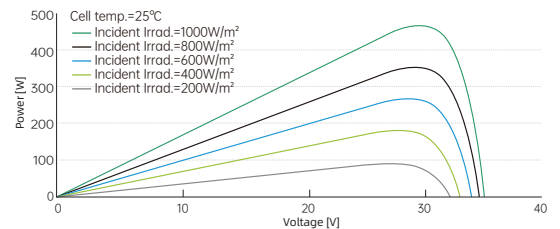

Note:mm (inch)